



# Caledonian



BS 5308 Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## BS5308 Part 1 / Type 2 (Armoured Cables) PE-IS-OS-SWA-PVC

RE-2Y(St)Y PIMF SWA Y 15P0.5

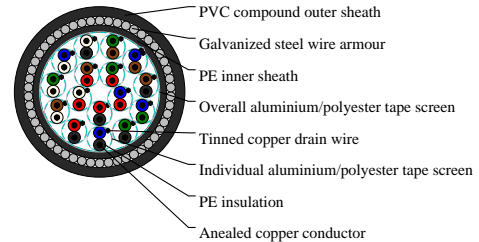

### APPLICATIONS

The armoured versions (Part 1 Type 2) are generally used when the risk of mechanical damage is increased. The galvanised steel wire armour provides excellent protection. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, Also used for the interconnection of electrical equipment and instruments, typically in petroleum industry. The armored versions are generally use for outdoor installation for direct burial or installed in the duct and suitable for wet and damp areas.

### CABLE CONSTRUCTION

Conductor: Annealed or tinned copper, multistranded(Class 5) to BS6360

Insulation: PE (Polyethylene) type 03 to BS6234

Pairing: Two insulated conductors uniformly twisted together with a lay not exceeding 100mm

Individual screen: Aluminium/polyester tape is applied over each pair metallic side down in contact with tinned copper drain wire, 0.5mm<sup>2</sup>

Binder tape: PETP transparent tape

Collective screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm<sup>2</sup>

Inner Sheath: PE (Polyethylene) type 2C or type 03 to BS6234

Armour: Galvanized steel wire armour

Outer sheath: PVC Sheath, type TM 1 to BS 6746

### COLOUR CODE

Insulation: See technical information

Outer Sheath: Black or blue

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature:

-40°C up to + 70°C( fixed installation)

0°C to +50°C(during operation )

Minimum bending radius:

6 x overall diameter

### Electrical Properties



# Caledonian

## BS 5308 Instrumentation Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Conductor Area Size:0.5 mm<sup>2</sup>

Conductor Stranding(No.xmm):16x0.2

Conductor resistance(max):39.7 ohm/km

Insulation resistance(min):5 Gohm/km

Capacitance unbalance at 1kHz(pair to pair screen):250 pF/250m

Max. Mutual Capacitance @ 1kHz for Non OS or OS cables(except 1 pair and 2 pairs):75 pF/m

Max. Mutual Capacitance @ 1kHz IS/OS cables (include 1 pair and 2 pairs):115 pF/m

Max. L/R Ratio for adjacent cores(Inductance/Resistance):25 µH/ohm

Test voltage:

Core to core:1000 V cores(Inductance/Resistance):25 µH/ohm

Test voltage:2000 V

Rated voltage:300/500 V

### DIMENSION AND PARAMETERS

No. of Pairs	Nominal Cross-sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Diameter Over Inner Sheath	Nominal Armour Wire Diameter	Nominal Outer Sheath Thickness
	mm <sup>2</sup>	no./mm	mm	mm	mm	mm	mm
15	0.5	16/0.2	0.6	1.3	20.9	1.6	1.8