



Caledonian



BS 6346 Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

BS 6346 PVC Insulated Cables, 1900/3300V

Single-core 1900/3300V cables with circular stranded copper conductor
1C70

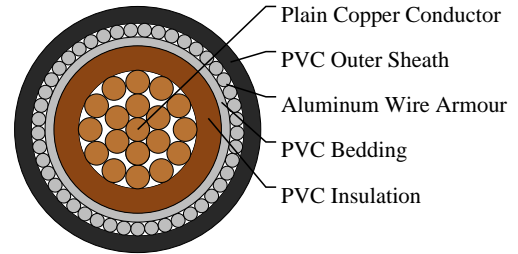

APPLICATIONS

These cables are used for power and control circuits, they can offer excellent protection through the use of a heavy galvanized steel wire armour, so they are well adapted to underground use in industrial applications, in moist areas.

STANDARDS

BS 6346

FIRE PERFORMANCE

Flame Retardant	IEC60332 part 1, BS4066 part 1
-----------------	--------------------------------

VOLTAGE RATING

1900/3300V

CABLE CONSTRUCTION

Conductor: Copper conductor, round stranded Class 2 to BS 6460, IEC 60228

Insulation: PVC (Polyvinyl Chloride) type T11

Filler (optional): PVC or Polypropylene yarn

Binder Tape (optional): Polyester (Mylar) tape

Inner Sheath/ Bedding: PVC (Polyvinyl Chloride)

Armour: AWA (Aluminum Wire Armour)

Outer Sheath: PVC (Polyvinyl Chloride), type TM1

COLOUR CODE

Insulation: Brown.

PHYSICAL AND THERMAL PROPERTIES

Temperature rating: -20°C to +60°C

Bending radius:

Single core: 10 x overall diameter



Caledonian

BS 6346 Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Multicores: 8 x overall diameter

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Sheath Thickness	Nominal Aluminum Wire Armour Diameter	Approx. Overall Diameter	Approx. Weight
No.×mm ²	no./mm	mm	mm	mm	mm	mm	kg/km
1x70	19/2.14	2.2	0.8	1.6	1.25	22.8	1070