



Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

TFOI/TFOU (MTX) 3.6/6kV XLPE Insulated, LSOH (SHF1) Sheathed,Armoured Flame Retardant MV Power Cables (Halogen Free Inner Covering)

MTX-3.6/6KV-RMZ1-1C35

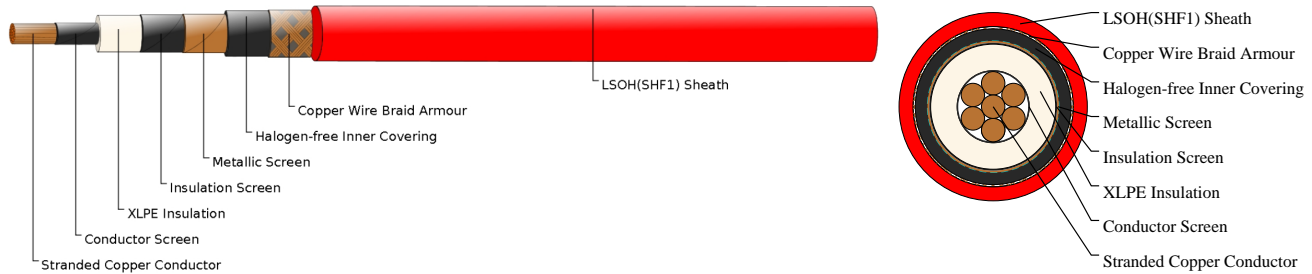

APPLICATIONS

These armoured MV cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free.

STANDARDS

IEC 60092-350/354/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Conductor Screen: Semi-conducting layer (tape/compound).

Insulation: XLPE.

Insulation Screen: Semi-conducting layer (tape/compound).

Metallic Screen: Copper tape.

Inner Covering: Halogen free compound.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: 12×OD

Temperature Range: -30°C ~ +80°C

DIMENSION AND PARAMETERS

| Caledonian Cable Code | Number x Nominal Diameter of Wire | Nominal Insulation Thickness | Nominal Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|-----------------------|-----------------------------------|------------------------------|--------------------------|-----------------------|----------------|
| | n x mm | mm | mm | mm | kg/km |



Caledonian

IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

| | | | | | |
|---------------------------|------|-----|-----|------|-----|
| MTX-3.6/6KV- RMZ1-1C35 | 1×35 | 2.5 | 1.6 | 23.2 | 940 |
|---------------------------|------|-----|-----|------|-----|