



# Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## TFOI/TFOU (MTX) 3.6/6kV XLPE Insulated, LSOH (SHF1) Sheathed, Armoured Flame Retardant MV Power Cables (Halogen Free Inner Covering)

MTX-3.6/6KV-RMZ1-3C35

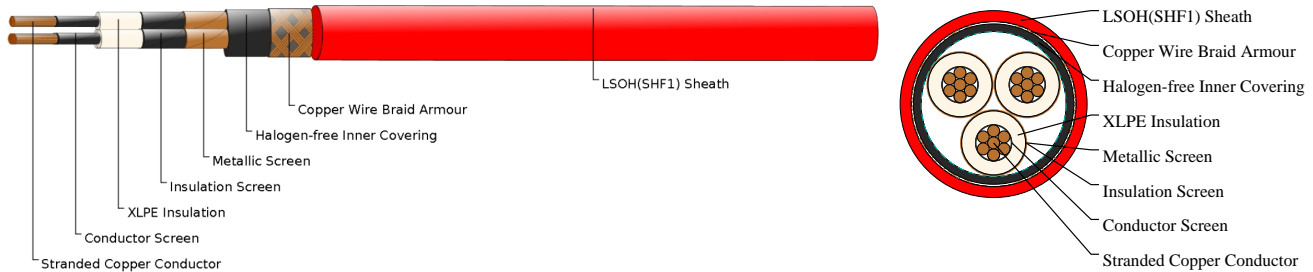

### APPLICATIONS

These armoured MV cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free.

### STANDARDS

IEC 60092-350/354/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

### CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Conductor Screen: Semi-conducting layer (tape/compound).

Insulation: XLPE.

Insulation Screen: Semi-conducting layer (tape/compound).

Metallic Screen: Copper tape.

Inner Covering: Halogen free compound.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

### COLOUR CODE

Coloured tape shall be inserted under metallic screen.

3core: Red, Yellow, Blue / Brown, Blue, Black

### PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations:  $9 \times OD$

Temperature Range:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

### DIMENSION AND PARAMETERS



# Caledonian

IEC60092 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Caledonian Cable Code	Number x Nominal Diameter of Wire	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
	n x mm	mm	mm	mm	kg/km
MTX-3.6/6KV-RMZ1-3C35	3×35	2.5	2.4	44.2	2930