



# Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

**TOI /TOU (MTX300) 0.6/1 kV XLPE Insulated, LSOH (SHF1) Sheathed, Armoured Flame Retardant Power & Control Cables (Single Core)**

MTX300-1RMZ1-R-1C4

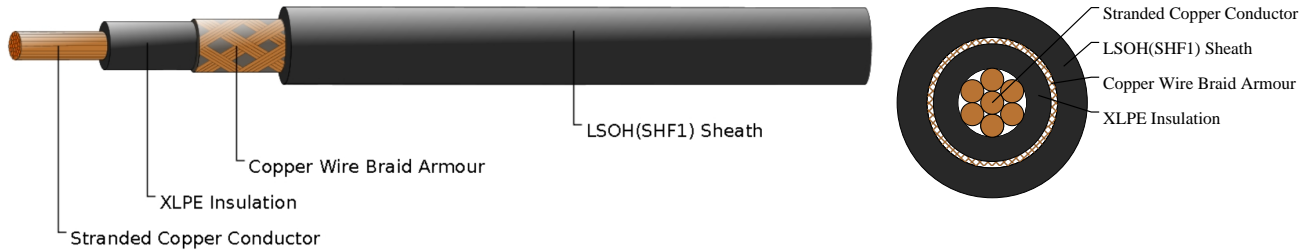

## APPLICATIONS

These armoured cables are used on board of ships in all locations for fixed installations where cable protection is required. These cables are flame retardant, low smoke & halogen free.

## STANDARDS

IEC 60092-350/353/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

## CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor, round or sector shaped. Class 5 stranded conductors can be offered upon request.

Insulation: XLPE.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

## COLOUR CODE

Single core: Black.

## PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: 6×OD

Temperature Range: -30°C ~ +80°C

## DIMENSION AND PARAMETERS

| Caledonian Cable Code | No. of Cores × Cross-sectional Area | Nominal Insulation Thickness | Nominal Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|-----------------------|-------------------------------------|------------------------------|--------------------------|-----------------------|----------------|
|                       | No.×mm <sup>2</sup>                 | mm                           | mm                       | mm                    | kg/km          |



# Caledonian

IEC60092 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

|                        |     |     |     |     |     |
|------------------------|-----|-----|-----|-----|-----|
| MTX300-1RMZ1-<br>R-1C4 | 1×4 | 0.9 | 1.1 | 7.4 | 100 |
|------------------------|-----|-----|-----|-----|-----|