



Caledonian



Instrumentation Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

NF M 87-202 EGFA

01 IQ 09 EGFA 1X7X0.88

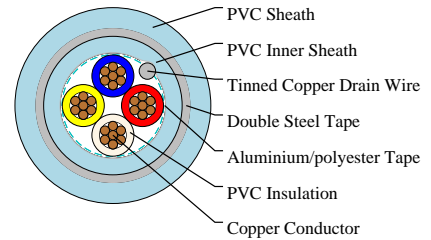

APPLICATIONS

These NF M 87-202 EGFA instrumentation cables are used to transmit analogue or digital signals in measurement and process control where chemicals may be present.

STANDARDS

NF M 87-202

UTE C 32-014

NF C 32-020

IEC 60332-1

IEC 60332-3-24

CABLE CONSTRUCTION

Conductor: Stranded copper conductor

Insulation: PVC (70 mm maximum pair length)

Binder tape: Polyester tape

Collective Screen: Aluminium/Polyester tape with tinned copper drain wire

Inner Sheath: PVC

Armouring: Double Steel Tape

Outer Sheath: PVC (Flame retardant, sunlight, mineral oil and hydrocarbon resistant)

COLOUR CODE

Insulation Core Identification:

Quad: Natural+Red+Blue+Yellow

Natural cores printed with pair/triple number

Outer Sheath Colour: Light-blue

PHYSICAL AND THERMAL PROPERTIES

Voltage Rating: 300/500V

Operating Temperature: -40°C/+90°C

Installation Temperature: MAX+50°C

Maximum Voltage: 250V



Caledonian

Instrumentation Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Voltage Test: 2000V

Maximum conductor d.c. Resistance:

7/0.40mm(0.88 sqmm) 21.40 Ohm/km at +20°C

Capacitance between cond. (nf/km):

0.88 sqmm ≤ 160

Type/codification:

1 Serie: Number of pairs, triples or quads / 01 to 27

2 Serie: Lay up in pair(IP) ,triple (IT) , quads (IQ)

3 Serie: Core section 05 (0.5mm²) , 09 (0.88 mm²) or 15(1.5mm²)

4 Serie: Overall screen(EG) or individual screen + overall screen(EI)

5 Serie: Mechanical protection: without armour (SF), with armour (FA), with lead + armour(PF)

DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Cores × Cross-sectional Area	Nominal Cross-sectional Area	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
	No.×mm ²	mm ²	mm	mm	kg/km
01 IQ 09 EGFA	1X4X0.88	0.88	10	11.4	195