



Caledonian



Instrumentation Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

NF M 87-202 EISF

07 IP 09 EISF 7X2X0.88

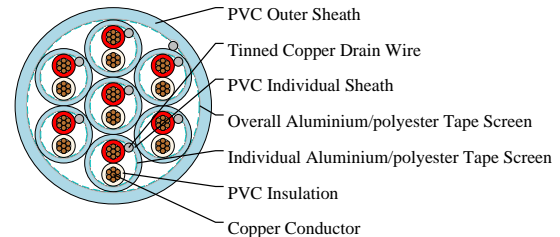

APPLICATIONS

These NF M 87-202 EISF instrumentation cables are used to transmit analogue or digital signals in easurement and process control where chemicals may be present.

STANDARDS

NF M 87-202

UTE C 32-014

NF C 32-020

IEC 60332-1

IEC 60332-3-24

CABLE CONSTRUCTION

Conductor: Stranded copper conductor

Insulation: PVC (70 mm maximum pair length)

Individual Binder Tape: Polyester tape

Individual Screen: Aluminium/Polyester tape with tinned copper drain wire

Individual Sheath: PVC

Overall Binder Tape : Polyester tape

Collective Screen: Aluminium/Polyester tape with tinned copper drain wire

Outer Sheath: PVC (Flame retardant, sunlight, mineral oil and hydrocarbon resistant)

COLOUR CODE

Insulation Core Identification:

Pair: Natural+Red

Natural cores printed with pair/triple number

Outer Sheath Colour: Light-blue

PHYSICAL AND THERMAL PROPERTIES

Voltage Rating: 300/500V

Operating Temperature: -40°C/+90°C

Installation Temperature: MAX+50°C



Caledonian

Instrumentation Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Maximum Voltage: 250V

Voltage Test: 2000V

Maximum conductor d.c. Resistance:

7/0.40mm(0.88 sqmm) 21.40 Ohm/km at +20°C

Capacitance between cond. (nf/km):

0.88 sqmm \leq 160

Type/codification:

1 Serie: Number of pairs, triples or quads / 01 to 27

2 Serie: Lay up in pair(IP) ,triple (IT) , quads (IQ)

3 Serie: Core section 05 (0.5mm²) , 09 (0.88 mm²) or 15(1.5mm²)

4 Serie: Overall screen(EG) or individual screen + overall screen(EI)

5 Serie: Mechanical protection: without armour (SF), with armour (FA), with lead + armour(PF)

DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Cores × Cross-sectional Area	Nominal Cross-sectional Area	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
	No. ×mm ²	mm ²	mm	mm	kg/km
07 IP 09 EISF	7X2X0.88	0.88	19	21.8	500