





Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

400Hz Airport Cables 7-core With Double Sheath & Control Wires 3×50+3×16+6×1

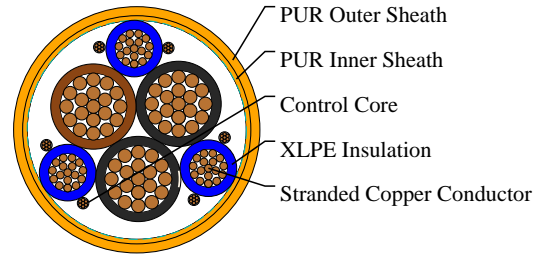

APPLICATIONS

These cables are designed for 400 Hz systems for power supply of aircraft, computer systems and radar stations, suitable for laying in earth, in water, outdoors, indoors and in cable ducts.

STANDARDS

VDE 0295

CABLE CONSTRUCTION

Conductor: Stranded copper conductor, Class 6 to VDE 0295/IEC 60228.

Insulation: XLPE.

Control Core: 1mm² stranded copper conductor with PVC insulation.

Inner Sheath: PUR

Outer Sheath: PUR.

PHYSICAL AND THERMAL PROPERTIES

Rated Voltage U₀/U (U_m):600V/1000V

Operating Temperatures:-55°C~+80°C

Minimum Bending Radius:static: 4×OD; dynamic: 6×OD

Flame Retardant:Yes

Abrasion Resistant:Yes

UV Resistant:Yes

Oil Resistant:Yes

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Diameter of Control Core	Nominal Diameter of 50mm ² Core	Nominal Diameter of 16mm ² Core	Nominal Diameter Under Outer Sheath	Nom. Overall Diameter	Approx. Weight
No. ×mm ²	mm	mm	mm	mm	mm	kg/km
3×50+3×16+6×1	2.5	12.2	7.2	30.4	34	2200