



# Caledonian



BS 5467 Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## BS 5467 Armoured Power Cables, 600/1000V

Three-core 600/1000V cables with solid aluminum conductors  
3C25

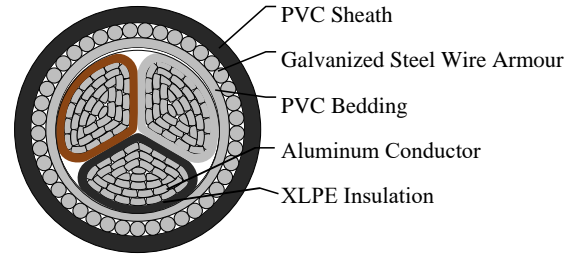

### APPLICATIONS

These cables are used for power and control circuits, they can offer excellent protection through the use of a heavy galvanized steel wire armour. The GSWA makes them suitable for use inside and outside buildings or for direct burial in the ground.

### STANDARDS

BS 5467

### FIRE PERFORMANCE

Flame retardant	IEC60332 part 1, BS4066 part 1
-----------------	--------------------------------

### VOLTAGE RATING

600/1000V

### CABLE CONSTRUCTION

Conductor: Solid Aluminum conductor, shaped, Class 1 to BS EN60228.

Insulation: XLPE (Cross-Linked Polyethylene) Type GP 8 conforming to BS 7655-1.3 or type GP6 conforming to BS 7655-1.2.

Bedding: The bedding shall consist of an extruded layer of polymeric material consistent with the operating temperature of the cable.

Armour: SWA (Galvanized steel Wire Armour)

Outer Sheath: Extruded PVC, type 9 specified in BS7655-4.2.

### COLOUR CODE

Insulation Colour: Brown, Black, Grey

### PHYSICAL AND THERMAL PROPERTIES

Temperature rating: 0°C to +90°C

Bending radius:

1.5mm<sup>2</sup> to 16mm<sup>2</sup>: 6 x overall diameter



**Caledonian**

BS 5467 Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

25mm<sup>2</sup> and above: 8 x overall diameter

#### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Sheath Thickness	Nominal Steel Wire Armour Diameter	Approx. Overall Diameter (Extruded Bedding)	Approx. Overall Diameter (Taped Bedding)	Approx. Weight
No.×mm <sup>2</sup>	mm	mm	mm	mm	mm	mm	kg/km
3x25 Shaped	0.9	1	1.7	1.6	22.5	22.1	1020