



# Caledonian



BS 7211 LSOH Sheathed Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H05Z-U

17AWG

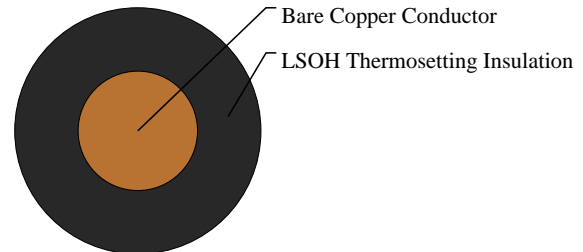

## APPLICATIONS

These cables are designed for the internal wiring of switchboards and distributor boards with an alternating nominal voltage up to 1000 Volts or a direct voltage up to 750 volts. Generally install in pipes or ducts and internal wiring of appliances with maximum operating temperature of 90° C, and generally in areas (such as public and government buildings) where smoke and toxic fumes may cause a threat to life and equipment. The cables produce no corrosive gasses when burnt which is particularly important where electronic equipment is installed.

## FIRE PERFORMANCE

Flame retardant	IEC 60332-1
Smoke density	EN 50268 / IEC 61034
Corrosiveness of combustion gases	EN 50267-2-2, IEC 60754-2
Flame test: flame-retardant	EN 50265-2-1, IEC 60332-1

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

Solid bare copper

Single wire to IEC 60228 Cl-1

Cross-link polyolefin EI5 core insulation

LSOH - low smoke, zero halogen

## COLOUR CODE

Green/Yellow, Black, Blue, Brown, Red, White, Yellow, Grey, Violet

## Electrical Properties

Working voltage: 300/500V

Test voltage: 2000V

Flexing bending radius: 15 x Ø

Static bending radius: 10 x Ø



# Caledonian

BS 7211 LSOH Sheathed Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Flexing temperature: +5° C to +90° C

Short circuit temperature: +250° C

Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Nom. Overall Diameter	Nominal Copper Weight	Approx. Weight	Min. Insulation Resistance at 90 °C
No. × mm <sup>2</sup>		mm	mm	kg/km	kg/km	MΩ × km
1x1	17	0.6	2.2-2.8	9.6	14	0.011