



# Caledonian


FIREFLIX Fire Resistant Instrumentation & Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## Fire Resistant CAT6 CWB/SWB/SWA Armoured Data Cables

FFX-CAT6 SF/UTP 4P23FR CWB

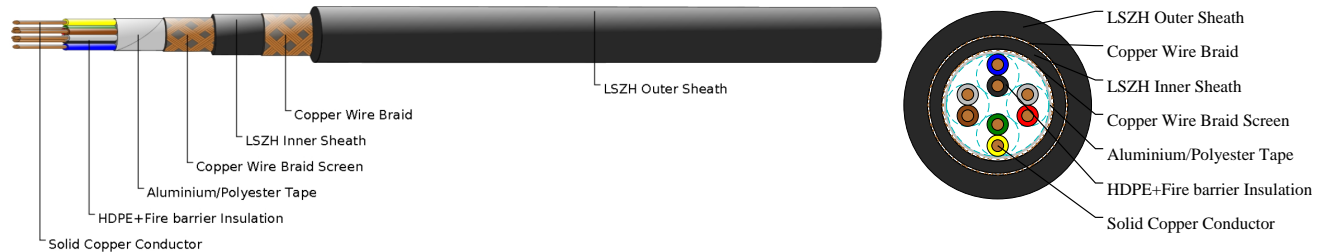

### APPLICATIONS

Cat6 Cable is a cable standard for Gigabit Ethernet and other network protocol, suitable for 10BaseT, 100BaseTx & 1000BaseT (Gigabit Ethernet) application. In addition, these cables can be offered with copper wire braid armoured & flame retardant outer sheath, providing additional mechanical protection still maintaining the flexibility of the cable.

### STANDARDS

ISO/IEC 11801

EN 50173

ANSI/TIA/EIA 568

### FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	IEC 60332-1-2; EN 60332-1-2
Reduced Fire Propagation (Vertically-mounted bundled wires & cables test)	IEC 60332-3-24; EN 60332-3-24
Halogen Free	IEC 60754-1; EN 50267-2-1
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2
Minimum Smoke Emission	IEC 61034-2; EN 61034-2
Circuit Integrity	IEC 60331-23; BS 6387 CWZ (Optional)

### CABLE CONSTRUCTION

Conductors: 23AWG solid bare copper.

Insulation: HDPE+Fire barrier.

Twinning: Two coloured insulated conductors twisted together to form a pair. Four pairs of twisted wires are respectively placed in the 4 grooves of the cross skeleton.

Overall Fire Barrier (optional).

Overall Screen1: Aluminium/polyester tape screen.

Overall Screen2: Copper wire braid screen.

Inner Sheath: Thermoplastic LSZH compound, coloured black.

Armouring: Copper Wire Braid(CWB).



# Caledonian

## FIREFLIX Fire Resistant Instrumentation & Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Outer Sheath: Halogen-free flame retardant thermoplastic LSZH compound type LTS3 as per BS 7655-6.1(Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered).

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti-rodent and anti-termite properties can be offered as option.

### PHYSICAL AND THERMAL PROPERTIES

Temperature range: -30°C - +75°C

Minimum bending radius during installation (mobile state): 8 x Overall Diameter

Minimum bending radius during operation (fixed state): 4 x Overall Diameter

### Electrical Properties

AWG: 23

Nominal Conductor Diameter: 0.57/0.58mm

Maximum DC Resistance@20°C: 9.38Ω/100m

Maximum DCR Unbalance: 3%

Maximum Mutual Capacitance: 5.8pF/m

Maximum Capacitance Unbalance: 30pF/100m

Characteristic Impedance@1-100MHz: 100±15Ω

Maximum Propagation Delay Skew: 18ns/100m

### DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Pairs	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Cable Weight
		mm	mm	mm	mm	mm	mm	kg/km
FFX-CAT6 SF/UTP 4P23FR CWB	4	0.57/0.58	0.65	1.77	0.6	1	11.96	191



Circuit Integrity  
IEC 60331-23/BS 6387(Optional)



EN 50173



Flame Retardancy  
BS EN 60332-1-2



Halogen Free  
IEC 60754-1



Low Corrosivity  
IEC 60754-2



Low Smoke Emission  
EN 61034-2



Reduced Fire Propagation  
EN 60332-3-24