



# Caledonian



FIRETOX LSZH Flame Retardant Instrumentation & Data Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## LSZH Flame Retardant CAT6 Data Cables

FTX-CAT6 U/UTP 4P23LH

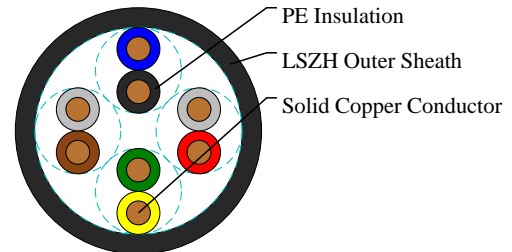

## APPLICATIONS

Cat6 Cable is a cable standard for Gigabit Ethernet and other network protocol, suitable for 10BaseT, 100BaseTx & 1000BaseT (Gigabit Ethernet) application. In addition, these cables can be offered with copper wire braid armoured & flame retardant outer sheath, providing additional mechanical protection still maintaining the flexibility of the cable.

## STANDARDS

ISO/IEC 11801

EN 50173

ANSI/TIA/EIA 568

## APPROVALS

ETL Certification (103488703CRT-001b, 103488703CRT-001c)

## FIRE PERFORMANCE

|   |                               |
|---|-------------------------------|
| Flame Retardance (Single Vertical Wire Test)                              | IEC 60332-1-2; EN 60332-1-2   |
| Reduced Fire Propagation (Vertically-mounted bundled wires & cables test) | IEC 60332-3-24; EN 60332-3-24 |
| Halogen Free  | IEC 60754-1; EN 50267-2-1     |
| No Corrosive Gas Emission   | IEC 60754-2; EN 50267-2-2     |
| Minimum Smoke Emission  | IEC 61034-2; EN 61034-2       |

## CABLE CONSTRUCTION

Conductors: 23AWG solid bare copper.

Insulation: PE.

Twinning: Two coloured insulated conductors twisted together to form a pair. Four pairs of twisted wires are respectively placed in the 4 grooves of the cross skeleton.

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered).



# Caledonian

## FIRETOX LSZH Flame Retardant Instrumentation & Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti-rodent and anti-termite properties can be offered as option

### PHYSICAL AND THERMAL PROPERTIES

Temperature range: -30°C - +75°C

Minimum bending radius during installation (mobile state): 8 x Overall Diameter

Minimum bending radius during operation (fixed state): 4 x Overall Diameter

### Electrical Properties

AWG: 23

Nominal Conductor Diameter: 0.56/0.57mm

Maximum DC Resistance@20°C: 9.38Ω/100m

Maximum DCR Unbalance: 3%

Maximum Mutual Capacitance: 5.8pF/m

Maximum Capacitance Unbalance: 30pF/100m

Characteristic Impedance@1-100MHz: 100±15Ω

Maximum Propagation Delay Skew: 18ns/100m

### DIMENSION AND PARAMETERS


| Caledonian Cable Code     | No. of Pairs | Conductor Diameter | Nominal Diameter over Insulation | Approx. Overall Diameter |
|---------------------------|--------------|--------------------|----------------------------------|--------------------------|
|                           |              | mm                 | mm                               | mm                       |
| FTX-CAT6 U/<br>UTP 4P23LH | 4            | 0.56/0.57          | 1.02                             | 6                        |



EN 50173



Flame Retardancy  
BS EN 60332-1-2



Halogen Free  
IEC 60754-1



Low Corrosivity  
IEC 60754-2



Low Smoke Emission  
EN 61034-2



Reduced Fire Propagation  
EN 60332-3-24