




# Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## U-1000 ARV FV

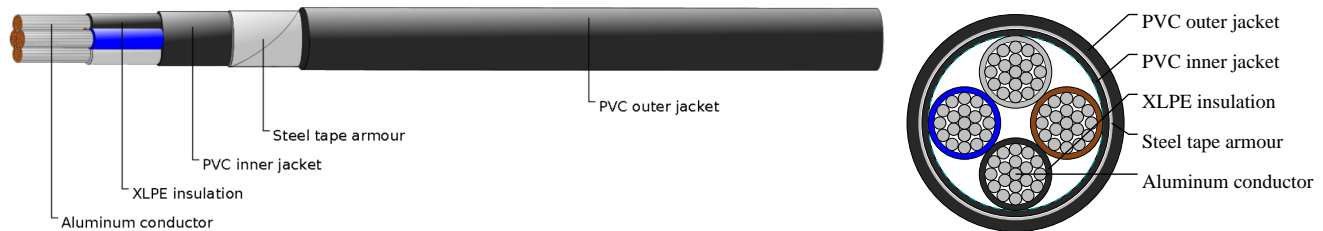

## APPLICATIONS

With a sheath and armor, U-1000 ARV FV is an enhanced version of the cables and U-1000 AR2V. They can be used in all industrial installations requiring mechanical protection. These cables can be provided in hard and SH C1 (NF C 32-323) and HR (resistant to aliphatic hydrocarbons). The design and characteristics of the materials comply with IEC 60502-1.

## STANDARDS

XP C 32-322

## VOLTAGE RATING

600/1000 V

## CABLE CONSTRUCTION

- Aluminum conductor
- Strands to IEC 60228 class 2
- XLPE insulation according to XP C 32-321
- Not fibrous and not hygroscopic filler
- PVC inner jacket
- Two steel tapes helically wrapped armour
- Flexible black PVC outer jacket

## COLOUR CODE

Insulation Colour Code

Color codes to HD 308 S2(XP C32-321)

4 cores - Blue + Brown + Black + Grey

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Minimum bending radius: 10 x Ø
- Operation temperature range: -15 °C to 90 °C
- Short-circuit temperature: 250 °C
- Flame retardant: EN60332-1/NF C 32-070 C2



# Caledonian

Industrial Cables (French Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Min. Mean Thickness of Sheath	Nominal Steel Wire Armour Diameter	Overall Diameter	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	mm	mm	kg/km
4x95	3/0	1.1	2.3	0.5	47.5	3120