




# Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## U-1000 RVFV

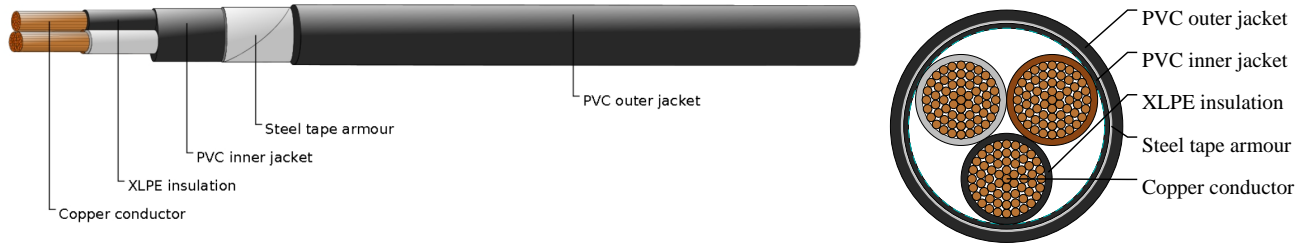

## APPLICATIONS

With a sheath and armor, U-1000 RVFV is an enhanced version of the cables and U-1000 R2V. They are suitable for direct burial without extra mechanical protection, fixed to the walls, laid on cable trays or raceways. May also be suitable for use in premises which poses a risk of explosion (rank BE3 NF C 15-100) with mechanical protection is necessary and in this case the intensity must be reduced by 15%.

## STANDARDS

XP C 32-322

## VOLTAGE RATING

600/1000 V

## CABLE CONSTRUCTION

- Flexible copper strands
- Strands to IEC 60228
- XLPE insulation according to XP C 32-321
- Not fibrous and not hygroscopic filler
- PVC inner jacket
- Two steel tapes helically wrapped armour
- Flexible black PVC outer jacket

## COLOUR CODE

Insulation Colour Code

Color codes to HD 308 S2(XP C32-321)

3 cores - Brown + Black + Blue

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Minimum bending radius:  $10 \times \varnothing$
- Operation temperature range:  $-15\text{ }^{\circ}\text{C}$  to  $90\text{ }^{\circ}\text{C}$
- Short-circuit temperature:  $250\text{ }^{\circ}\text{C}$
- Flame retardant: EN60332-1/NF C 32-070 C2



# Caledonian

Industrial Cables (French Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Steel Wire Armour Diameter	Overall Diameter	Approx. Weight
No.×mm <sup>2</sup>		mm	mm	mm	mm	kg/km
3x240	750MCM	1.7	2.7	0.5	61	10575