

High Voltage DC Silicon Rubber Cables



Caledonian

CONTENT

15kV DC Screened Silicon Wire	3
15kV DC Unscreened Silicon Wire	5
20kV DC Screened Silicon Wire	7
20kV DC Unscreened Silicon Wire	9
25kV DC Screened Silicon Wire	11
25kV DC Unscreened Silicon Wire	13
30kV DC Screened Silicon Wire	15
30kV DC Unscreened Silicon Wire	17
50kV DC Screened Silicon Wire	19
50kV DC Unscreened Silicon Wire	21
100kV DC Screened Silicon Wire	23
100kV DC Unscreened Silicon Wire	25



5kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



5kV

CONSTRUCTION:

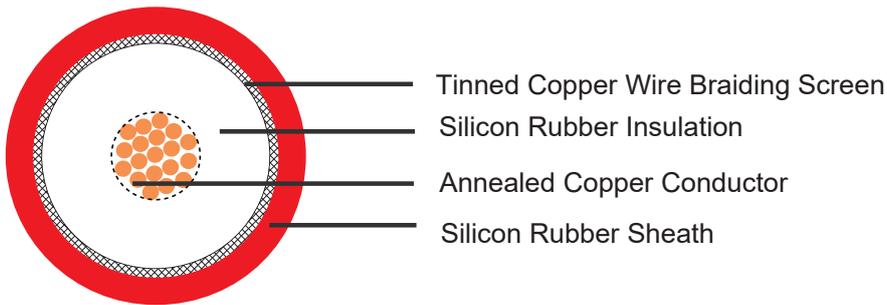

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
5DC-SCS-1C0.20	1x0.20	7/0.20	0.6	4.1
5DC-SCS-1C0.35	1x0.35	19/0.16	0.8	4.3
5DC-SCS-1C0.50	1x0.50	16/0.2	0.94	4.5
5DC-SCS-1C0.75	1x0.75	24/0.2	1.2	5.3
5DC-SCS-1C1.0	1x1.0	32/0.2	1.34	5.8
5DC-SCS-1C1.5	1x1.5	30/0.25	1.6	6.6
5DC-SCS-1C2.5	1x2.5	49/0.25	2.1	7.5



5kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

15kV

CONSTRUCTION:

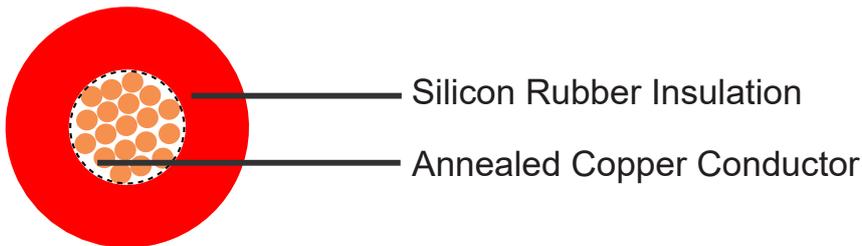

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
5DC-S-1C0.20	1x0.20	7/0.20	0.6	2.6
5DC-S-1C0.35	1x0.35	19/0.16	0.8	2.8
5DC-S-1C0.50	1x0.50	16/0.2	0.94	3.0
5DC-S-1C0.75	1x0.75	24/0.2	1.2	3.6
5DC-S-1C1.0	1x1.0	32/0.2	1.34	4.0
5DC-S-1C1.5	1x1.5	30/0.25	1.6	4.6
5DC-S-1C2.5	1x2.5	49/0.25	2.1	5.4



10kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage

10kV



CONSTRUCTION:

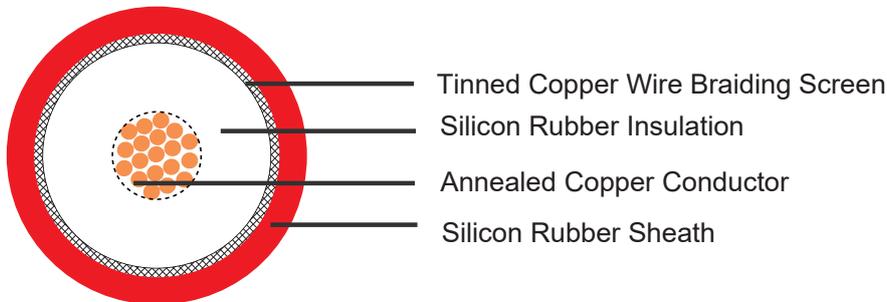

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
10DC-SCS-1C0.20	1x0.20	7/0.20	0.6	4.7
10DC-SCS-1C0.35	1x0.35	19/0.16	0.8	4.9
10DC-SCS-1C0.50	1x0.50	16/0.2	0.94	5.1

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
10DC-SCS-1C0.75	1x0.75	24/0.2	1.2	6.2
10DC-SCS-1C1.0	1x1.0	32/0.2	1.34	6.4
10DC-SCS-1C1.5	1x1.5	30/0.25	1.6	6.6
10DC-SCS-1C2.5	1x2.5	49/0.25	2.1	7.8
10DC-SCS-1C4.0	1x4.0	56/0.3	2.61	8.0
10DC-SCS-1C6.0	1x6.0	84/0.3	3.21	8.2



10kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

10kV

CONSTRUCTION:

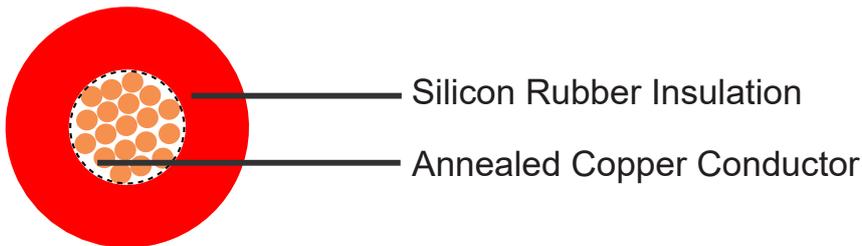

Conductor: Annealed copper conductor, class 5.
Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
10DC-S-1C0.20	1x0.20	7/0.20	0.6	3.2
10DC-S-1C0.35	1x0.35	19/0.16	0.8	3.4
10DC-S-1C0.50	1x0.50	16/0.2	0.94	3.6

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
10DC-S-1C0.75	1x0.75	24/0.2	1.2	4.2
10DC-S-1C1.0	1x1.0	32/0.2	1.34	4.4
10DC-S-1C1.5	1x1.5	30/0.25	1.6	5.2
10DC-S-1C2.5	1x2.5	49/0.25	2.1	5.8
10DC-S-1C4.0	1x4.0	56/0.3	2.61	6.8
10DC-S-1C6.0	1x6.0	84/0.3	3.21	7.6



15kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



15kV

CONSTRUCTION:

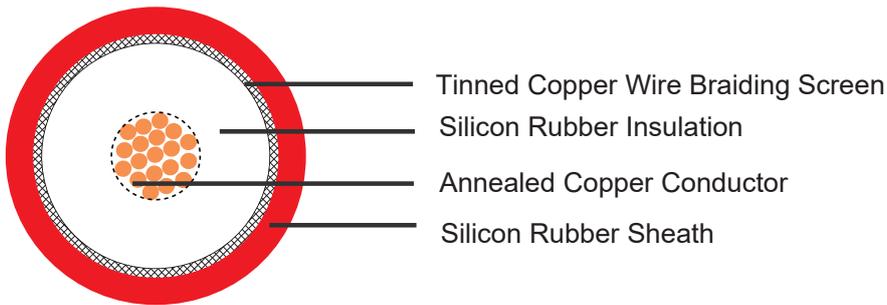

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
15DC-SCS-1C0.20	1x0.20	7/0.20	0.6	5.5
15DC-SCS-1C0.35	1x0.35	19/0.16	0.8	5.7
15DC-SCS-1C0.50	1x0.50	16/0.2	0.94	5.9
15DC-SCS-1C0.75	1x0.75	24/0.2	1.2	6.9
15DC-SCS-1C1.0	1x1.0	32/0.2	1.34	7.0
15DC-SCS-1C1.5	1x1.5	30/0.25	1.6	8.0
15DC-SCS-1C2.5	1x2.5	49/0.25	2.1	8.6
15DC-SCS-1C4.0	1x4.0	56/0.3	2.61	9.6
15DC-SCS-1C6.0	1x6.0	84/0.3	3.21	10.4



15kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

15kV

CONSTRUCTION:

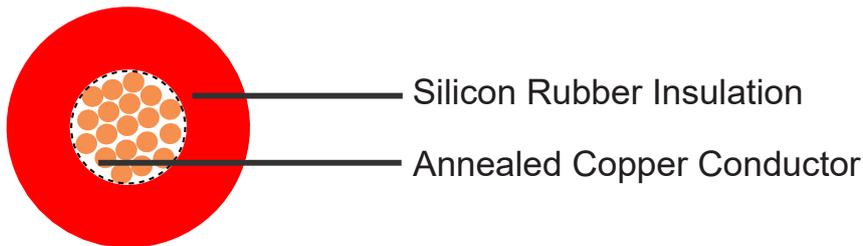

Conductor: Annealed copper conductor, class 5.
Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
15DC-S-1C0.20	1x0.20	7/0.20	0.6	4.0
15DC-S-1C0.35	1x0.35	19/0.16	0.8	4.2
15DC-S-1C0.50	1x0.50	16/0.2	0.94	4.4

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
15DC-S-1C0.75	1x0.75	24/0.2	1.2	5.2
15DC-S-1C1.0	1x1.0	32/0.2	1.34	5.3
15DC-S-1C1.5	1x1.5	30/0.25	1.6	6.0
15DC-S-1C2.5	1x2.5	49/0.25	2.1	6.6
15DC-S-1C4.0	1x4.0	56/0.3	2.61	7.6
15DC-S-1C6.0	1x6.0	84/0.3	3.21	8.4



20kV DC Screened Silicon Wire


APPLICATIONS:

The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage

20kV

CONSTRUCTION:

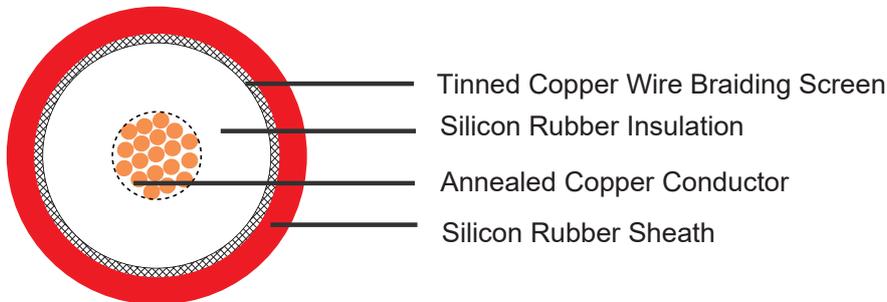

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
20DC-SCS-1C0.20	1x0.20	7/0.20	0.6	5.7
20DC-SCS-1C0.35	1x0.35	19/0.16	0.8	5.9
20DC-SCS-1C0.50	1x0.50	16/0.2	0.94	6.1

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
20DC-SCS-1C0.75	1x0.75	24/0.2	1.2	7.3
20DC-SCS-1C1.0	1x1.0	32/0.2	1.34	7.5
20DC-SCS-1C1.5	1x1.5	30/0.25	1.6	8.1
20DC-SCS-1C2.5	1x2.5	49/0.25	2.1	9.0
20DC-SCS-1C4.0	1x4.0	56/0.3	2.61	10.0
20DC-SCS-1C6.0	1x6.0	84/0.3	3.21	10.8



20kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

20kV

CONSTRUCTION:

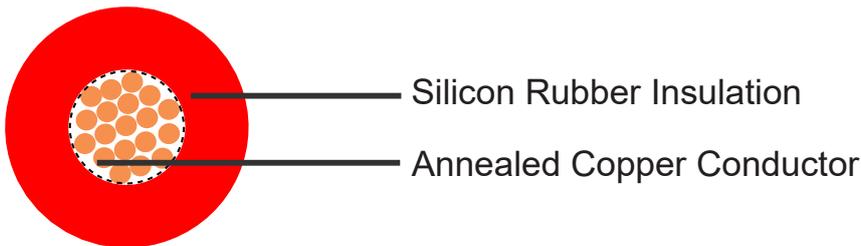

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
20DC-S-1C0.20	1x0.20	7/0.20	0.6	4.2
20DC-S-1C0.35	1x0.35	19/0.16	0.8	4.4
20DC-S-1C0.50	1x0.50	16/0.2	0.94	4.6

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
20DC-S-1C0.75	1x0.75	24/0.2	1.2	5.6
20DC-S-1C1.0	1x1.0	32/0.2	1.34	5.8
20DC-S-1C1.5	1x1.5	30/0.25	1.6	6.4
20DC-S-1C2.5	1x2.5	49/0.25	2.1	7.0
20DC-S-1C4.0	1x4.0	56/0.3	2.61	8.0
20DC-S-1C6.0	1x6.0	84/0.3	3.21	8.8



25kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



25kV

CONSTRUCTION:

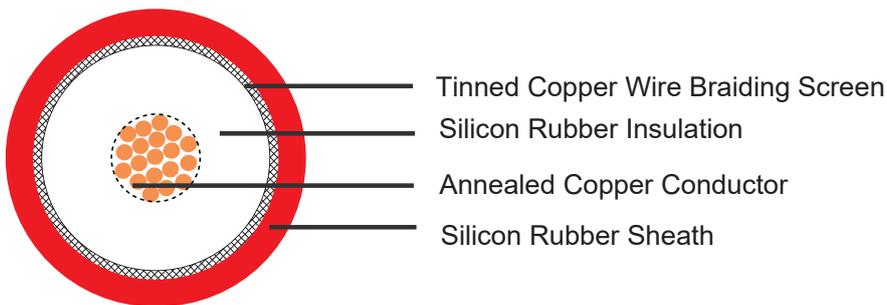

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
25DC-SCS-1C0.20	1x0.20	7/0.20	0.6	7.1
25DC-SCS-1C0.35	1x0.35	19/0.16	0.8	7.3
25DC-SCS-1C0.50	1x0.50	16/0.2	0.94	7.5
25DC-SCS-1C0.75	1x0.75	24/0.2	1.2	8.3
25DC-SCS-1C1.0	1x1.0	32/0.2	1.34	8.5
25DC-SCS-1C1.5	1x1.5	30/0.25	1.6	8.7
25DC-SCS-1C2.5	1x2.5	49/0.25	2.1	10.0
25DC-SCS-1C4.0	1x4.0	56/0.3	2.61	11.0
25DC-SCS-1C6.0	1x6.0	84/0.3	3.21	11.8



25kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

25kV

CONSTRUCTION:

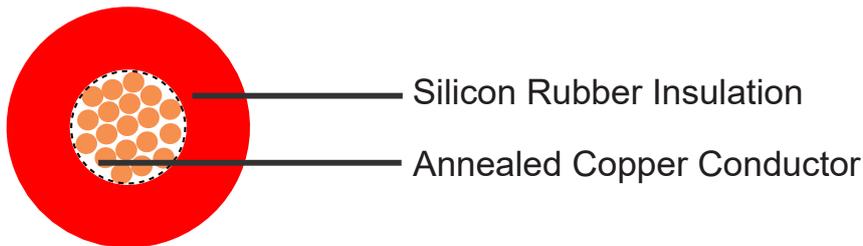

Conductor: Annealed copper conductor, class 5.
Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
25DC-S-1C0.20	1x0.20	7/0.20	0.6	5.6
25DC-S-1C0.35	1x0.35	19/0.16	0.8	5.8
25DC-S-1C0.50	1x0.50	16/0.2	0.94	6.0

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
25DC-S-1C0.75	1x0.75	24/0.2	1.2	6.6
25DC-S-1C1.0	1x1.0	32/0.2	1.34	6.8
25DC-S-1C1.5	1x1.5	30/0.25	1.6	7.5
25DC-S-1C2.5	1x2.5	49/0.25	2.1	8.0
25DC-S-1C4.0	1x4.0	56/0.3	2.61	9.0
25DC-S-1C6.0	1x6.0	84/0.3	3.21	9.8



30kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



30kV

CONSTRUCTION:

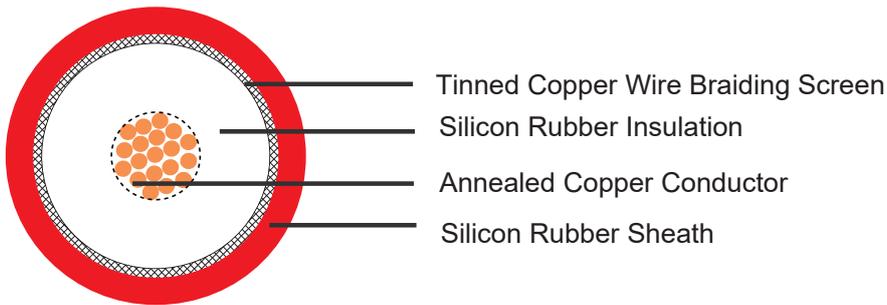

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	
30DC-SCS-1C0.20	1x0.20	7/0.20	0.6	8.1
30DC-SCS-1C0.35	1x0.35	19/0.16	0.8	8.3
30DC-SCS-1C0.50	1x0.50	16/0.2	0.94	8.5
30DC-SCS-1C0.75	1x0.75	24/0.2	1.2	9.7
30DC-SCS-1C1.0	1x1.0	32/0.2	1.34	9.9
30DC-SCS-1C1.5	1x1.5	30/0.25	1.6	10.7
30DC-SCS-1C2.5	1x2.5	49/0.25	2.1	11.4
30DC-SCS-1C4.0	1x4.0	56/0.3	2.61	12.5
30DC-SCS-1C6.0	1x6.0	84/0.3	3.21	13.2



30kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

30kV

CONSTRUCTION:

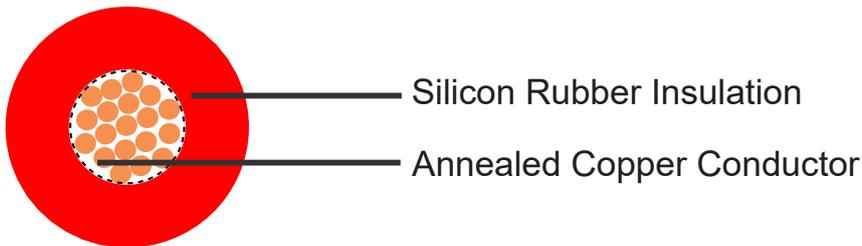

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
30DC-S-1C0.20	1x0.20	7/0.20	0.6	6.6
30DC-S-1C0.35	1x0.35	19/0.16	0.8	6.8
30DC-S-1C0.50	1x0.50	16/0.2	0.94	7.0

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
30DC-S-1C0.75	1x0.75	24/0.2	1.2	8.0
30DC-S-1C1.0	1x1.0	32/0.2	1.34	8.2
30DC-S-1C1.5	1x1.5	30/0.25	1.6	9.0
30DC-S-1C2.5	1x2.5	49/0.25	2.1	9.4
30DC-S-1C4.0	1x4.0	56/0.3	2.61	10.5
30DC-S-1C6.0	1x6.0	84/0.3	3.21	11.2



50kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



50kV

CONSTRUCTION:

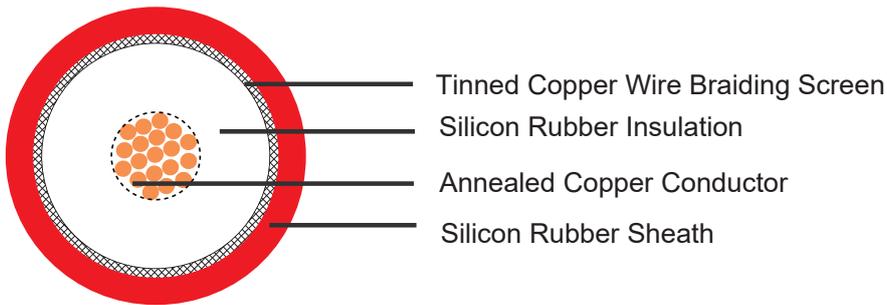

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
50DC-SCS-1C0.20	1x0.20	7/0.20	0.6	16.0
50DC-SCS-1C0.35	1x0.35	19/0.16	0.8	16.3
50DC-SCS-1C0.50	1x0.50	16/0.2	0.94	16.5
50DC-SCS-1C0.75	1x0.75	24/0.2	1.2	17.3
50DC-SCS-1C1.0	1x1.0	32/0.2	1.34	17.5
50DC-SCS-1C1.5	1x1.5	30/0.25	1.6	18.6
50DC-SCS-1C2.5	1x2.5	49/0.25	2.1	19.2
50DC-SCS-1C4.0	1x4.0	56/0.3	2.61	21.5
50DC-SCS-1C6.0	1x6.0	84/0.3	3.21	22.5



50kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

50kV

CONSTRUCTION:

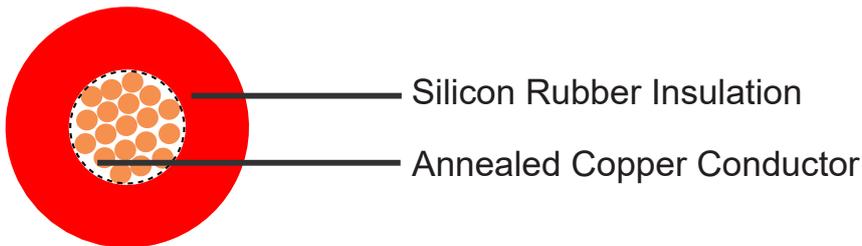

Conductor: Annealed copper conductor, class 5.
Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
50DC-S-1C0.20	1x0.20	7/0.20	0.6	14.6
50DC-S-1C0.35	1x0.35	19/0.16	0.8	14.8
50DC-S-1C0.50	1x0.50	16/0.2	0.94	15.0

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
50DC-S-1C0.75	1x0.75	24/0.2	1.2	15.6
50DC-S-1C1.0	1x1.0	32/0.2	1.34	15.8
50DC-S-1C1.5	1x1.5	30/0.25	1.6	16.6
50DC-S-1C2.5	1x2.5	49/0.25	2.1	17.2
50DC-S-1C4.0	1x4.0	56/0.3	2.61	19.0
50DC-S-1C6.0	1x6.0	84/0.3	3.21	20.0



100kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage



100kV

CONSTRUCTION:

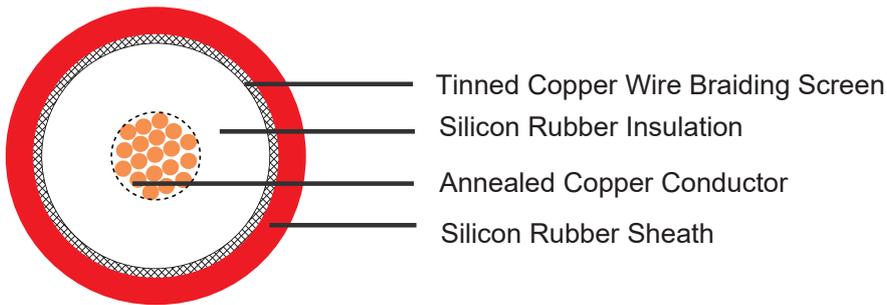

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
100DC-SCS-1C1.0	1x1.0	32/0.2	1.34	26.7
100DC-SCS-1C1.5	1x1.5	30/0.25	1.6	29.5
100DC-SCS-1C2.5	1x2.5	49/0.25	2.1	30.2



100kV DC Unscreened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.



Rated Voltage

100kV

CONSTRUCTION:

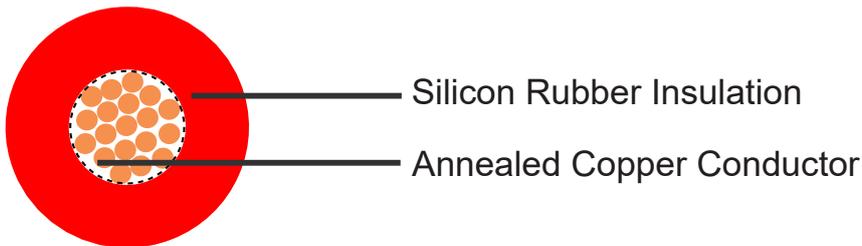

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Approx. Overall Diameter
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	
	mm ²	No./mm	mm	mm
100DC-S-1C1.0	1x1.0	32/0.2	1.34	25.0
100DC-S-1C1.5	1x1.5	30/0.25	1.6	27.8
100DC-S-1C2.5	1x2.5	49/0.25	2.1	28.5

50kV DC Screened Silicon Wire

APPLICATIONS:


The single core cables are suitable for high-voltage cabinet, power system, high voltage electric machineries, television receivers, transformers, high-voltage cables for electronic instruments, etc.

Rated Voltage

50kV



CONSTRUCTION:

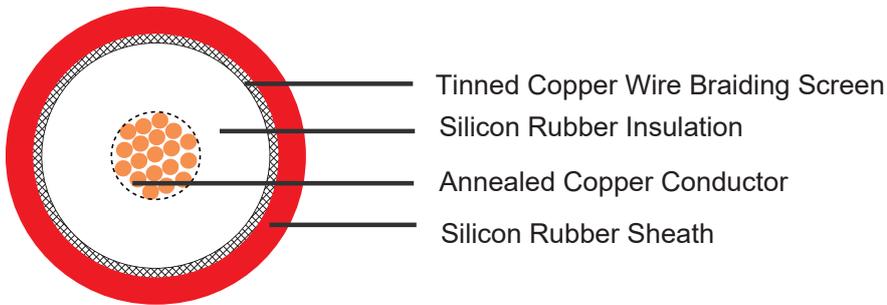

Conductor: Annealed copper conductor, class 5.

Insulation: Silicon rubber.

Screen: Tinned copper wire braiding.

Sheath: Silicon rubber.

COLOR CODE:

Red, (other colours upon request).

PHYSICAL PROPERTIES:

Operating Temperature: -45°C-180°C

Dimension Data

Part NO.	Conductor			Overall Diameter	
	No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Diameter	Min.	Max.
	mm ²	No./mm	mm	mm	
HVDC-SCS-1C0.75	1x0.75	24/0.2	1.2	13.0	17.3