



Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

TFOI/TFOU (MTX) 6/10KV XLPE Insulated, LSOH (SHF1) Sheathed, Armoured Flame Retardant MV Power Cables (Halogen Free Inner Covering)

MTX-6/10kV-RMZ1-1C150

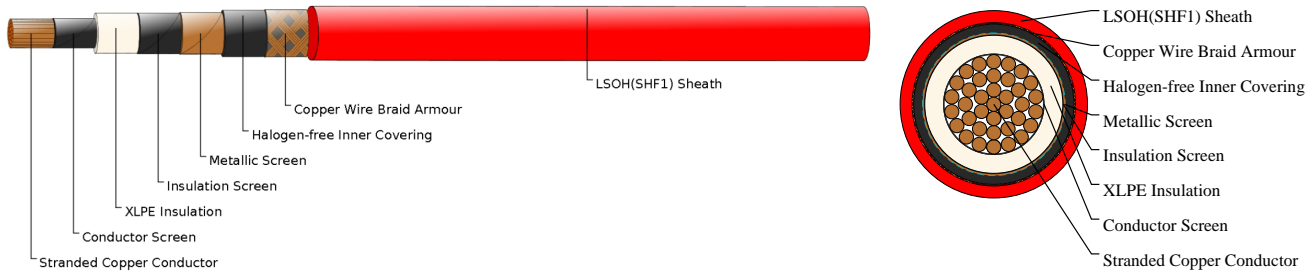

APPLICATIONS

These armoured MV cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free.

STANDARDS

IEC 60092-350/354/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Conductor Screen: Semi-conducting layer (tape/compound).

Insulation: XLPE.

Insulation Screen: Semi-conducting layer (tape/compound).

Metallic Screen: Copper tape.

Inner Covering: Halogen free compound.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: 12×OD

Temperature Range: -30°C ~ +80°C

DIMENSION AND PARAMETERS

Caledonian Cable Code	Number x Nominal Diameter of Wire	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
	n x mm	mm	mm	mm	kg/km



Caledonian

IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

MTX-6/10kV- RMZ1-1C150	1×150	3.4	2	34.4	2470
---------------------------	-------	-----	---	------	------