



Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

TFOI/TFOU (MTX) 8.7/15KV XLPE Insulated, LSOH (SHF1) Sheathed, Armoured Flame Retardant MV Power Cables (Halogen Free Inner Covering)

MTX-8.7/15KV-RMZ1-3C70

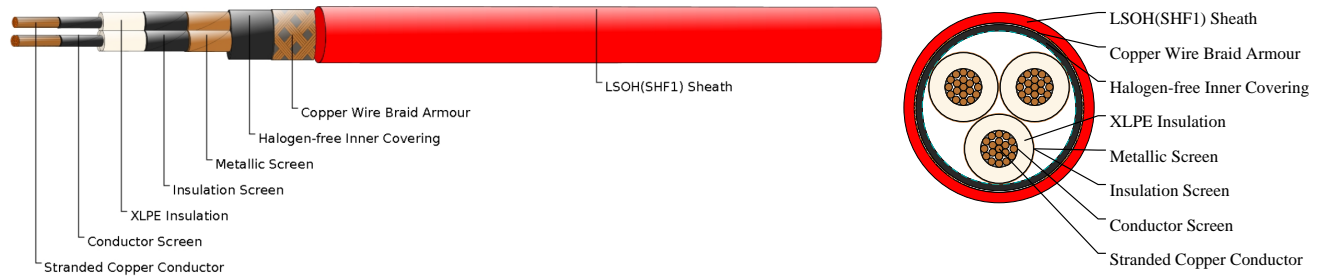

APPLICATIONS

These armoured MV cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free.

STANDARDS

IEC 60092-350/354/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Conductor Screen: Semi-conducting layer (tape/compound).

Insulation: XLPE.

Insulation Screen: Semi-conducting layer (tape/compound).

Metallic Screen: Copper tape.

Inner Covering: Halogen free compound.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

COLOUR CODE

Coloured tape shall be inserted under metallic screen.

3core: Red, Yellow, Blue / Brown, Blue, Black

PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: $9 \times OD$

Temperature Range: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

DIMENSION AND PARAMETERS



Caledonian

IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

| Caledonian Cable Code | Number x Nominal Diameter of Wire | Nominal Insulation Thickness | Nominal Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|------------------------|-----------------------------------|------------------------------|--------------------------|-----------------------|----------------|
| | n x mm | mm | mm | mm | kg/km |
| MTX-8.7/15KV-RMZ1-3C70 | 3×70 | 4.5 | 3 | 61.5 | 5340 |