



Caledonian



FIREGUARD Flame Retardant Instrumentation & Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Flame Retardant CAT5E Data Cables

FGD-CAT5E F/UTP 4P24

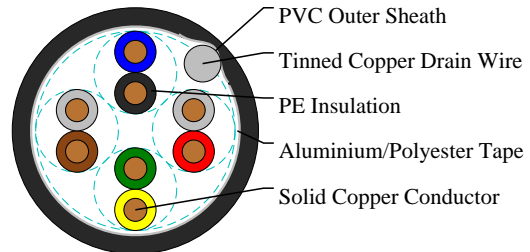

APPLICATIONS

Cat5E is a cable standard for Gigabit Ethernet and other network protocol, suitable for basic voice and data installations up to 100 MHz. In addition, these cables can be offered with copper wire braid armoured & flame retardant outer sheath, providing additional mechanical protection still maintaining the flexibility of the cable.

STANDARDS

ISO/IEC 11801

EN 50173

ANSI/TIA/EIA 568

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	BS EN 60332-1-2
----------------------------------------------	-----------------

CABLE CONSTRUCTION

Conductors: 24AWG solid bare copper.

Insulation: PE.

Twining: Two coloured insulated conductors twisted together to form a pair.

Overall Screen: Aluminium/polyester tape screen with drain wire.

Outer Sheath: Thermoplastic PVC compound.

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti-rodent and anti-termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

PHYSICAL AND THERMAL PROPERTIES

Temperature range: -30°C - +75°C

Minimum bending radius during installation (mobile state): 8 x Overall Diameter

Minimum bending radius during operation (fixed state): 4 x Overall Diameter

Electrical Properties

AWG: 24



Caledonian

FIREGUARD Flame Retardant Instrumentation & Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Nominal Conductor Diameter: 0.53mm

Maximum DC Resistance@20°C: 9.38Ω/100m

Maximum DCR Unbalance: 5%

Maximum Mutual Capacitance: 55.8pF/m

Maximum Capacitance Unbalance: 330pF/100m

Characteristic Impedance@1-100MHz: 100±15Ω

Maximum Propagation Delay Skew: 45ns/100m

DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Pairs	Conductor Diameter	Nominal Diameter over Insulation	Approx. Overall Diameter
		mm	mm	mm
FGD-CAT5E F/UTP 4P24	4	0.53	1	6.3



EN 50173



Flame Retardancy
BS EN 60332-1-2